WASHING

—

NORMAL SPIN WASHERS
LOW AND MEDIUM CAPACITY
LN-35C/45C TP2



CHARACTERISTICS

TP2
- User friendly and totally programmable 7” TP2 touch screen
- USB Connection. PC software free of charge for programming, traceability, data analysis…
- Videos on display (ads, instructions)
- 37 languages
- 8 dosing signals as standard

G FACTOR
- G-FACTOR 200.

EFFICIENCY
- Intelligent consumption.
- Optimal loading.
- Water Recovery tanks ready: KRS.
- Low water consumption.

VERSATILITY
- Make to order: customisation .
- OPL < > COIN.
- Electric < > Hot water.
- Wet cleaning features.

CONNECTIVITY
- Remote technical service.
- Managemant of laundries: OPL and selfservice.
- Remote payment.

ERGONOMICS
- Biggest door diameters: Ø560 (for LN-35C/45C).
- Easy opening/closing system for door lock.

MAINTENANCE
- Hinged panel: easy access to parts.
- Equivalent parts for all models: contactors, electronic devices, gear.
- Technical menu: traceability, error diagnosis.

OTHERS
- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product Option ETL.

OPTIONS

- Double drain.
- Normally closed valve.
- Silicon gasket (for LN-35).
- WaterFULL FLOW recirculation of bath water.
- Relay card with 6 extra dosing signals: up to 14 signals.
- Printer.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Stainless steel outer casing.
- Stainless steel front panel.
- SLUICE: model with 8mm drum holes (for LN-35C/45C).
- Anchoring base.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Coin / token kit.
- Delayed door opening in case of power outage.

	U.	LN-35C TP2		LN-45C TP2	
DRUM					
Load capacity 1:9 / 1:10	Kg	39/35		47/42	
Volume	l	350		450	
Diameter	mm	860		860	
Depth	mm	602		720	
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	45/644		45/644	
G Factor	-	200		200	
Maximum force transmitted	KN	4,59 ±8		5,9 ±8	
Frequency-dynamic force	Hz	7,58		7,58	
Noise level	dB	<70		<70	
Coin laundry version	-	Yes		Yes	
Double drain	-	Opt.		Opt.	
Weighing system / Tilting system	-	No		No	
SLUICE Version	-	Yes		Yes	
DOOR					
Height center door / Height door	mm	735/440		735/440	
Diameter	mm	560		560	
POWER					
Motor	kW	4		6	
Electric heating power	kW	21		21	
Total electric power (electric model)	kW	22		22	
Total electric power (hw, steam model)	kW	4		6	
CONNECTIONS		ELECTRIC	STEAM/HOT WATER	ELECTRIC	STEAM/HOT WATER
Tension 230V- I + N + T	Nº x mm2 / A	-	2x4+T / 32A	-	-
Tension 230V- III + T	Nº x mm2 / A	3x16+T/63A	3x2,5+T / 20A	3x16+T / 63A	3x4+T / 32A
Tension 400V- III + N + T	Nº x mm2 / A	4 x6+T / 40A	4x1,5+T / 16A	4x6+T / 40A	4x1,5+T / 16A
Steam inlet (Steam model)	inch	3/4"		3/4"	
Maximum steam consumption (Steam model)	Kg/h	18		21	
Water inlet	inch	3/4"		3/4"	
Water main pressure	Kg/cm^2	2-4		2-4	
Maximum water consump.	Lit/h	199,6*		256,6*	
Drain	mm/inch	3"		3"	
Drainage capacity	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	979/1.045		979/1.125	
Net Depth / Gross Depth	mm	1.155/1.280		1.325/1.440	
Net Height / Gross Height	mm	1.411/1.655		1.411/1.640	
Net weight / Gross weight	Kg	476/510		600/670	
Volume	m^3	2,2		2,6	

* Programme No. 20, 75% load

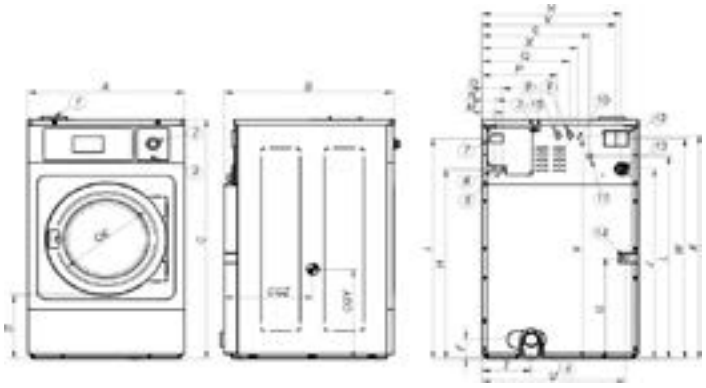

01. Soap dispenser
02. Emergency stop
03. USB port
04. Drain
05. Electric connection to liquid soap pump
06. Electrical connection
07. Main switch
08. Auxiliar water inlet
09. Hot water inlet
10. Equipotential connection
11. Cold water inlet
12. Blur output / Water overload
13. Liquid soap connection
14. Steam connection
15. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LN-35C	mm	979	1.155	1.411	370	560	149	623	1.139	1.307	1.116	1.322	1.211	61	74	101	545	625	885	715	262	917	855	1.281	760	1.373	635	682
LN-45C	mm	979	1.325	1.411	370	560	154	623	1.139	1.307	1.116	1.322	1.211	61	74	101	545	625	885	715	262	917	855	1.281	760	1.373	635	760